


Tol. poss. robot/Tol. for broken edges		Tol. somern. in mm/knots/°/d. on symm. and deep.	
od/over	3 6	od/over	100 300 1000
do/fo	3 6	do/fo	100 300 1000 3000
mm	0.2 0.5 1	mm	0.4 0.6 0.8 1
(*)		mm	0.6 0.8 1

—	□	Tot. prem. in ravn./Tot. on straightness and flatness						ISO 2768-2
		10		30		100		
od/over		10	30	100	300	1000	3000	
do/ro		10	30	100	300	1000	3000	
mm		0,05	0,1	0,2	0,4	0,6	0,8	
(\pm)								



Tot. doz. mer. razen za posn. rubore/Tot. of linear dim. except for broken edges											
od/over do/to	0,5	3	6	30	120	400	1000	2000	12	2	ISO 2761-1
	3	6	30	120	400	1000	2000	4000			
mm [in]	0,1	0,1	0,1	0,3	0,5	0,8					

[illegible]

Razmnoževanje, prodaja tretjemu ali uporaba v namere, ki niso dogovorjeni ni dovoljena !

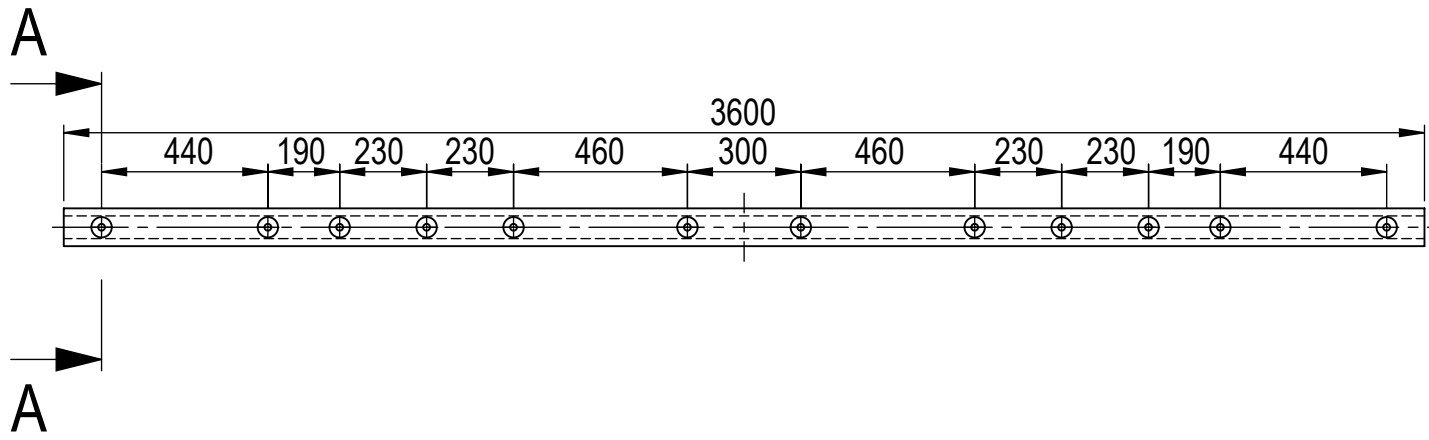

Prerez A-A
M 1 : 1

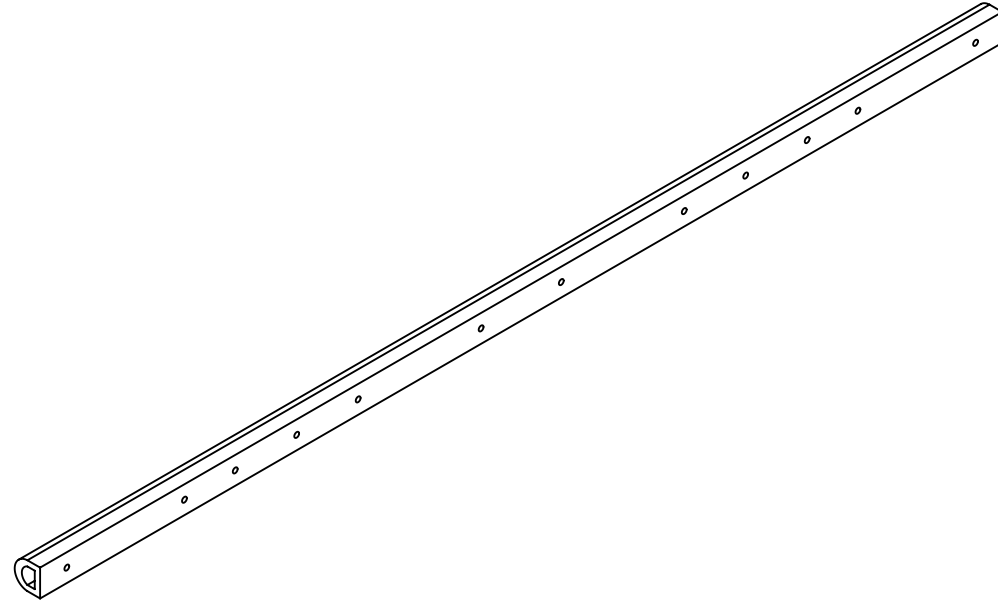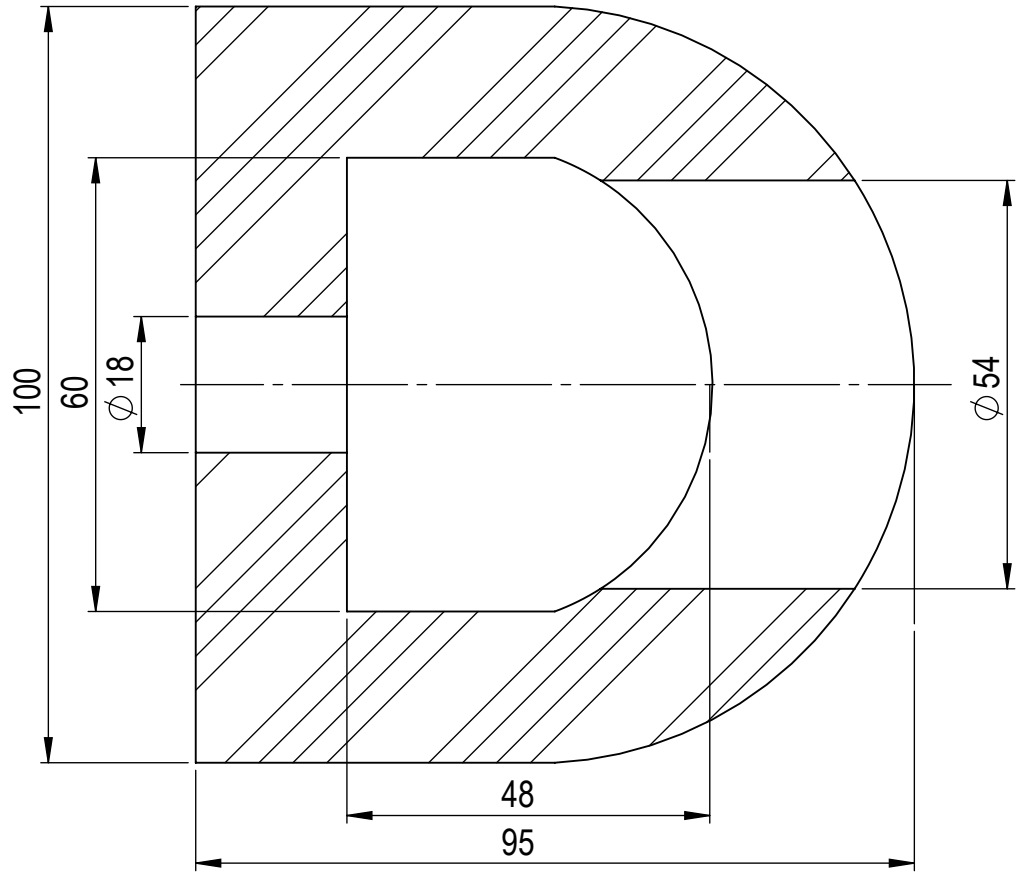

OPOMBA:

-Za tehnično izdelovalne pogoje glej risbo št. 1133-000-001!

[illegible]