


DETAJL POLAGANJA PE-HD IN ABC CEVI (60°)

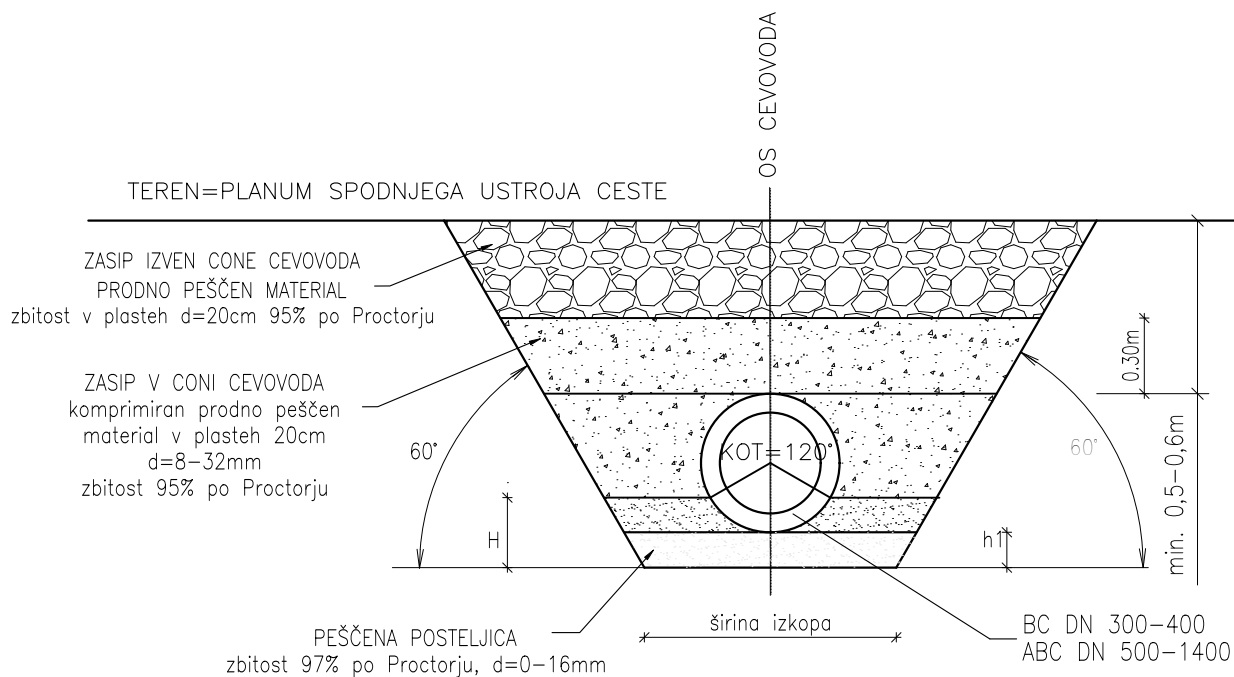

PREMER CEVI	ŠIRINA IZKOPA (m)	PEŠČENO LEŽIŠČE (m³/m)			h1 (m)	H (m)
PE-HD 200mm	0.80			0.15	0.10	0.18
PE-HAD 250mm	0.85			0.18	0.10	0.20
PE-HD 315mm	0.90			0.22	0.13	0.24
PE-HD 400mm	1.00			0.27	0.14	0.28
PE-HD 500mm	1.10			0.34	0.15	0.31
PE-HD 630mm	1.20			0.40	0.16	0.35
PE-HD 800mm	1.30			0.48	0.17	0.39
BC DN 800mm	1.40			0.56	0.18	0.43
BC DN 900mm	1.50			0.64	0.19	0.47
BC DN 1000mm	1.60			0.73	0.20	0.51
BC DN 1200mm	1.90			0.98	0.22	0.59
BC DN 1400mm	2.10			1.22	0.24	0.68

Opomba: V času gradnje ceste je potrebno minimalno kritje nad temenom cevi 50 cm.

0.210 x 0.297 = 0.062 m²

AC&P inženirski biro d.o.o.
podjetje za geotehniko, infrastrukturo in raziskave
tovarniška c. 26, 5270 ajdovščina | +386(0)5 8500740 | info@acap.si



Vsebina risbe:
Detajl polaganja PE-HD in BC kanalizacijskih cevi

Merilo:
1 : 50

Št. risbe:
G.151.1