
app

Appendix 3 TreeParker layout

Standalone system
TreeParker system is designed and tested as a standalone system. There are many layout possibilities, and all can be combined to make the best possible fit in your project.


Standard spacing between the individual units is up to 75 mm. More is possible depending on the design. TreeParker systems parallel to curved roads are possible up to a diameter of 5 mtr.




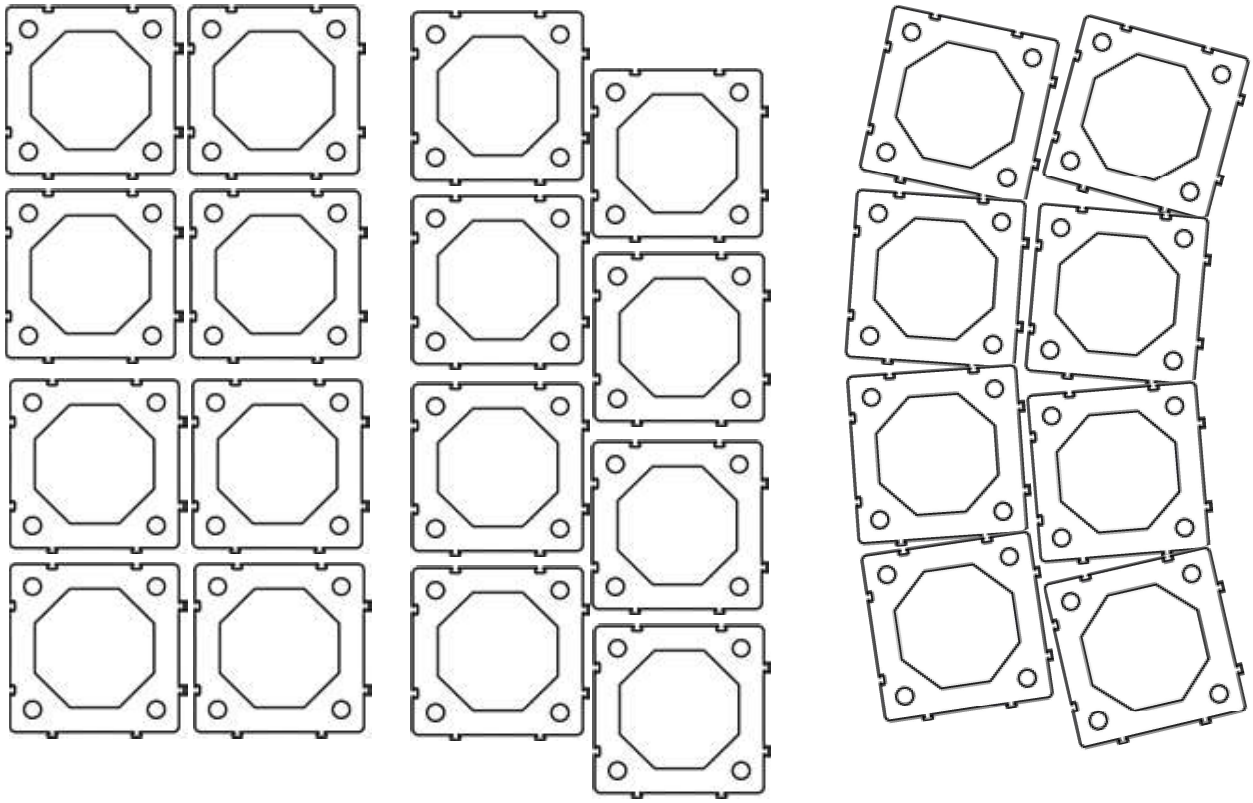




Connected system
The individual units can be connected directly to one and another. But the most common used system is a connected system with spacers. Spacers are available in 50 and 75 mm, making almost every dimension possible with a connected system.
Although the spacers are not necessary for the strength of the system, contractors use it because it is decreasing the installation time.

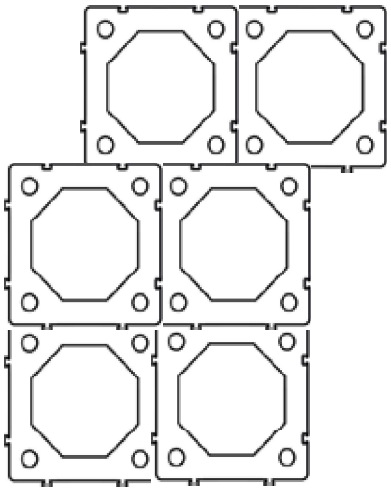

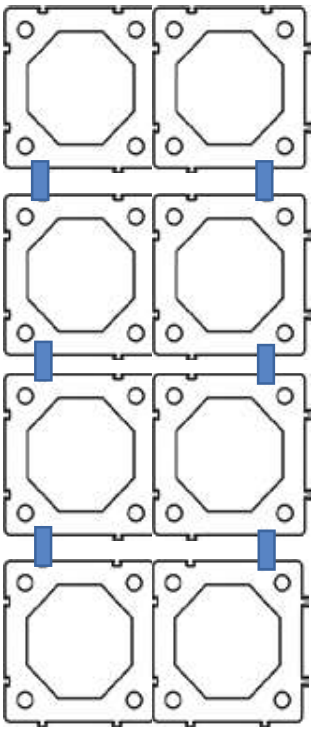

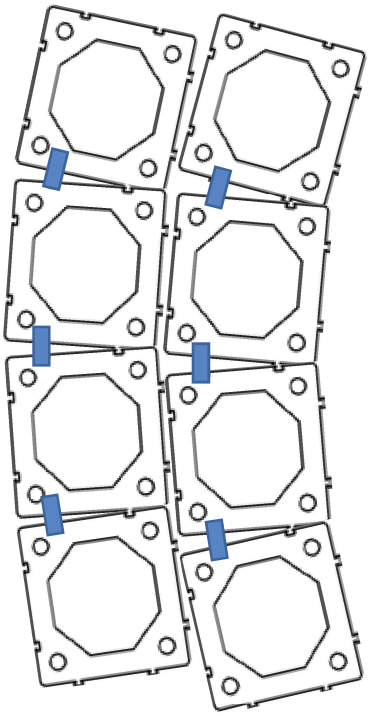

To prevent shifting of the units during backfilling, connect all units in the perimeter of the system with spacers.



