

A

B

C

D

E

F

A




B

C

D

E


F

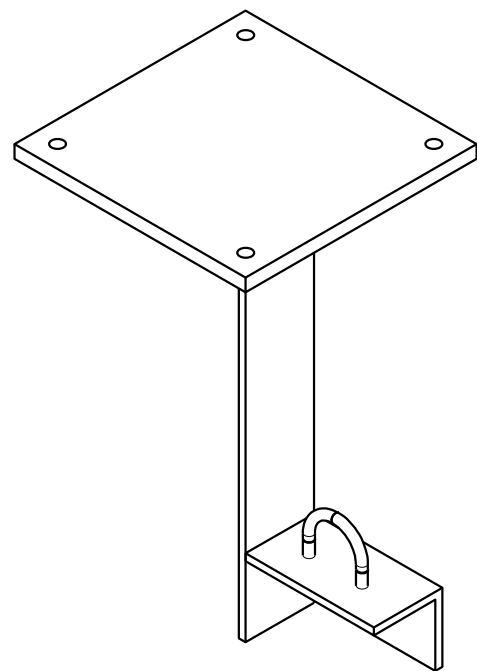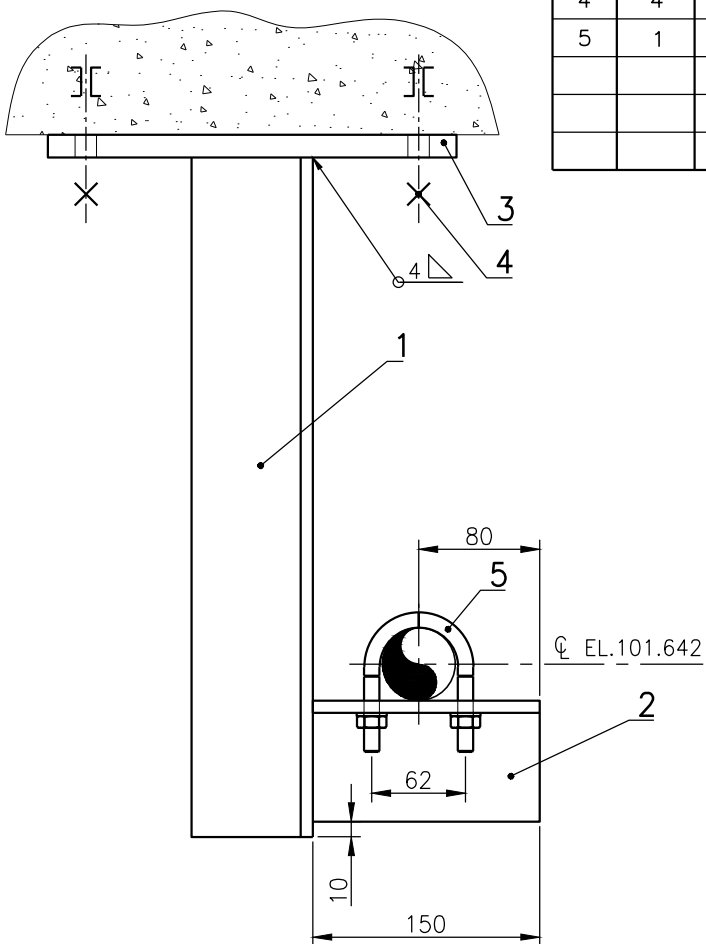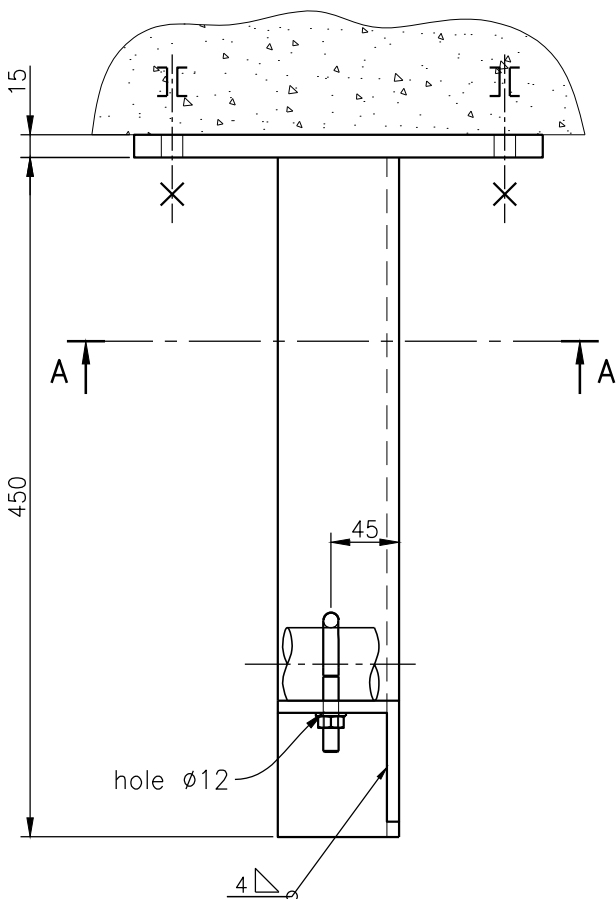


ISO VIEW

NOTES:

1. ALL DIMENSIONS ARE IN MILIMETERS.
2. MATERIAL GRADE SHALL BE ASTM A36 OR THE EQUIVALENT (S275J2 OR S355J2).
3. SUPPORT SHALL BE SANDBLASTED AND COATED ACCORDING TO NEK PROCEDURE SP-A322.
4. ANCHORING ACCORDING TO HILTI INSTRUCTIONS.
5. THE CUT OF REBARS IS NOT PERMITTED. APLY SCANNING FOR POSITIONING OF THE ANCHOR BOLTS AND ADAPT HOLES' LOCATIONS AS NEEDED.
6. WELDING ACCORDING TO AWS D1.1. FILLET WELD. BUTT WELDS FULL PENETRATING.

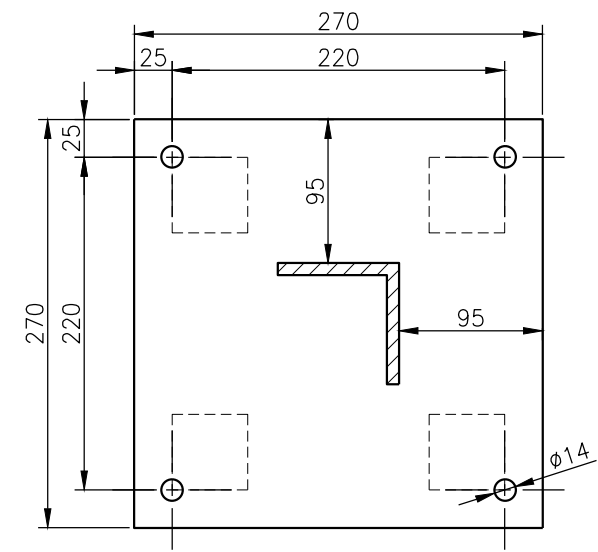

A-A (1:5)



NON-SAFETY RELATED

1. Interim Dwg. No.:	SIP-MN034-SUPPORT-004-IA
----------------------	--------------------------