Slope stability analysis

Input data

Project

Task : Zemeljski plaz na parceli *191 k.o. Zgornje Grušovje pri hiši Zgornje Grušovje 10b
Description : Pilotna stena
Customer : Občina Oplotnica
Author : GEOING d.o.o.
Date : 08/04/2025

Settings

Slovenia - EN 1997 (52)




Stability analysis

Earthquake analysis : Standard
Verification methodology : according to EN 1997
Design approach : 2 - reduction of actions and resistances


Partial factors on actions (A)					
Permanent design situation					
		Unfavourable		Favourable	
Permanent actions :	γ_G =	1,35	[–]	1,00	[–]
Variable actions :	γ_Q =	1,50	[–]	0,00	[–]
Water load :	γ_w =	1,35	[–]		

Partial factors for resistances (R)			
Permanent design situation			
Partial factor on sliding resistance (on slip surface) :	γ_{Rs} =	1,10	[–]

Interface

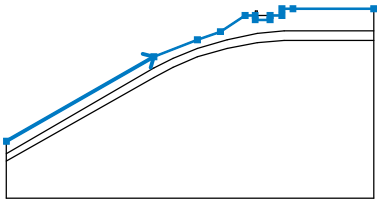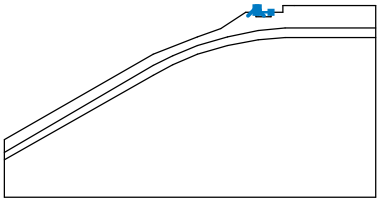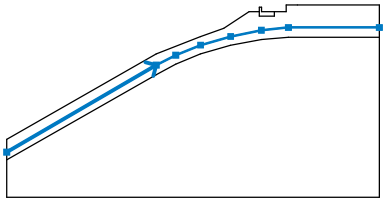No.	Interface location	Coordinates of interface points [m]					
		x	z	x	z	x	z
1		0,00	2,70	19,90	14,10	25,80	16,40
		28,90	17,50	32,25	19,70	33,60	19,70
		33,60	19,10	35,60	19,10	35,60	19,70
		37,20	19,70	37,20	20,60	38,70	20,60
		49,60	20,60				
2		33,60	19,70	33,60	20,30	33,90	20,30
		33,90	19,70	35,60	19,70		
3		0,00	1,00	19,90	12,60	22,50	13,90
		25,80	15,25	29,80	16,40	33,90	17,25
		37,50	17,60	49,60	17,60		

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

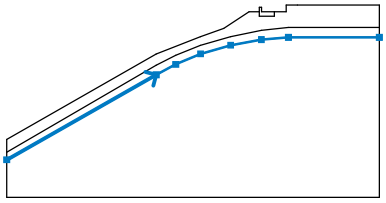No.	Interface location	Coordinates of interface points [m]					
		x	z	x	z	x	z
4		0,00	0,00	19,90	11,30	22,50	12,70
		25,80	14,10	29,80	15,25	33,90	16,00
		37,50	16,30	49,60	16,30		

Soil parameters - effective stress state

No.	Name	Pattern	φ_{ef} [°]	c_{ef} [kPa]	γ [kN/m^3]
1	Glina		21,00	3,00	19,00
2	Preperina		30,00	10,00	21,00
3	Hribina		34,00	30,00	23,00
4	AB vezna konzola		45,00	100,00	24,00

Soil parameters - uplift

No.	Name	Pattern	γ_{sat} [kN/m^3]	γ_s [kN/m^3]	n [–]
1	Glina		19,00		
2	Preperina		21,00		
3	Hribina		23,00		
4	AB vezna konzola		24,00		

Soil parameters

Glina

Unit weight : γ = 19,00 kN/m^3
Stress-state : effective
Angle of internal friction : φ_{ef} = 21,00 °
Cohesion of soil : c_{ef} = 3,00 kPa
Saturated unit weight : γ_{sat} = 19,00 kN/m^3

Preperina

Unit weight : γ = 21,00 kN/m^3




[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Stress-state : effective
Angle of internal friction : φ_{ef} = 30,00 °
Cohesion of soil : c_{ef} = 10,00 kPa
Saturated unit weight : γ_{sat} = 21,00 kN/m^3


Hribina
Unit weight : γ = 23,00 kN/m^3
Stress-state : effective
Angle of internal friction : φ_{ef} = 34,00 °
Cohesion of soil : c_{ef} = 30,00 kPa
Saturated unit weight : γ_{sat} = 23,00 kN/m^3

AB vezna konzola
Unit weight : γ = 24,00 kN/m^3
Stress-state : effective
Angle of internal friction : φ_{ef} = 45,00 °
Cohesion of soil : c_{ef} = 100,00 kPa
Saturated unit weight : γ_{sat} = 24,00 kN/m^3

Assigning and surfaces

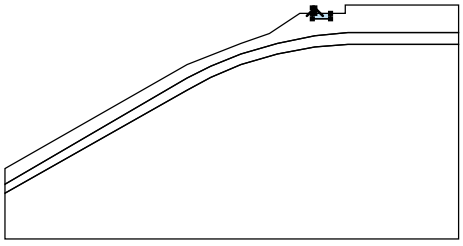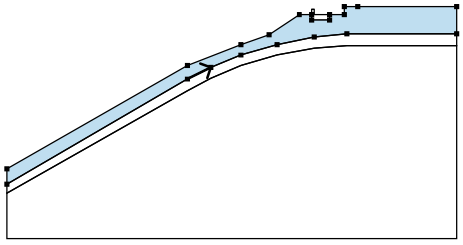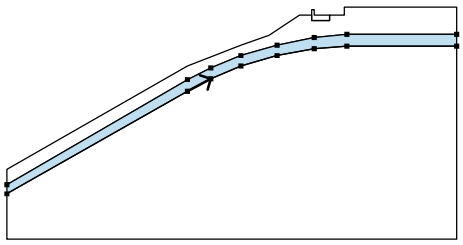No.	Surface position	Coordinates of surface points [m]				Assigned soil
		x	z	x	z	
1		33,90	19,70	33,90	20,30	AB vezna konzola
		33,60	20,30	33,60	19,70	
		33,60	19,10	35,60	19,10	
		35,60	19,70			
2		19,90	12,60	22,50	13,90	Glina
		25,80	15,25	29,80	16,40	
		33,90	17,25	37,50	17,60	
		49,60	17,60	49,60	20,60	
		38,70	20,60	37,20	20,60	
		37,20	19,70	35,60	19,70	
		35,60	19,10	33,60	19,10	
		33,60	19,70	32,25	19,70	
		28,90	17,50	25,80	16,40	
		19,90	14,10	0,00	2,70	
		0,00	1,00			
3		19,90	11,30	22,50	12,70	Preperina
		25,80	14,10	29,80	15,25	
		33,90	16,00	37,50	16,30	
		49,60	16,30	49,60	17,60	
		37,50	17,60	33,90	17,25	
		29,80	16,40	25,80	15,25	
		22,50	13,90	19,90	12,60	
		0,00	1,00	0,00	0,00	

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

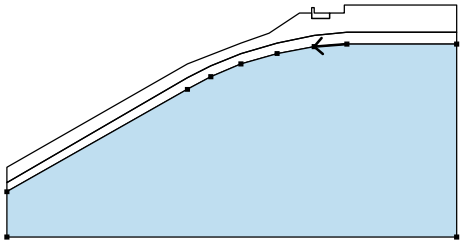No.	Surface position	Coordinates of surface points [m]				Assigned soil
		x	z	x	z	
4		37,50	16,30	33,90	16,00	Hribina
		29,80	15,25	25,80	14,10	
		22,50	12,70	19,90	11,30	
		0,00	0,00	0,00	-5,00	
		49,60	-5,00	49,60	16,30	

Anti-Slide piles

No.	Point		Length	Pile spacing	Cross-section	Pile bearing capacity			
	x [m]	z [m]	l [m]	b [m]	[m]	Distribution along the pile	Max. bearing capacity V_u [kN]	Gradient K [–]	Passive force direction
1	34,15	19,70	6,60	1,20	d = 0,50	linear	150,00	0,50	perpendicular to pile
2	35,15	19,70	6,60	1,20	d = 0,50	linear	150,00	0,50	perpendicular to pile

Surcharge

No.	Type	Type of action	Location z [m]	Origin x [m]	Length l [m]	Width b [m]	Slope α [°]	Magnitude q, q_1, f, F	Magnitude q_2	Magnitude unit
1	strip	permanent	on terrain	x = 38,70	l = 10,50		0,00	200,00		kN/m^2
2	strip	permanent	on terrain	x = 33,90	l = 3,30		0,00	12,00		kN/m^2

Surcharges

No.	Name
1	Hiša
2	Nasip nad vezno konzolo

Water

Water type : No water

Tensile crack

Tensile crack not input.

Earthquake

Earthquake not included.

Settings of the stage of construction

Design situation : permanent

Results (Stage of construction 1)

Analysis 1

Polygonal slip surface

Coordinates of slip surface points [m]									
x	z	x	z	x	z	x	z	x	z
23,57	15,53	26,07	15,84	29,19	16,47	33,21	17,32	36,22	18,11
38,08	18,96	39,40	20,60						
Analysis of the slip surface without optimization.									

The forces acting on the pile

Anti-Slide Pile No. 1 (34,15; 19,70 [m])
Horizontal active force: 99,16 kN/m
Horizontal passive force: 74,76 kN/m

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]


Depth of slip surface: 2,13 m
The length of pile below terrain: 6,60 m

Anti-Slide Pile No. 2 (35,15; 19,70 [m])
Horizontal active force: 112,46 kN/m
Horizontal passive force: 88,47 kN/m
Depth of slip surface: 1,87 m
The length of pile below terrain: 6,60 m

Slope stability verification (Morgenstern-Price)
Utilization : 17,9 %

Slope stability ACCEPTABLE

Name : Analysis **Stage - analysis : 1 - 1**
Description : Drsina

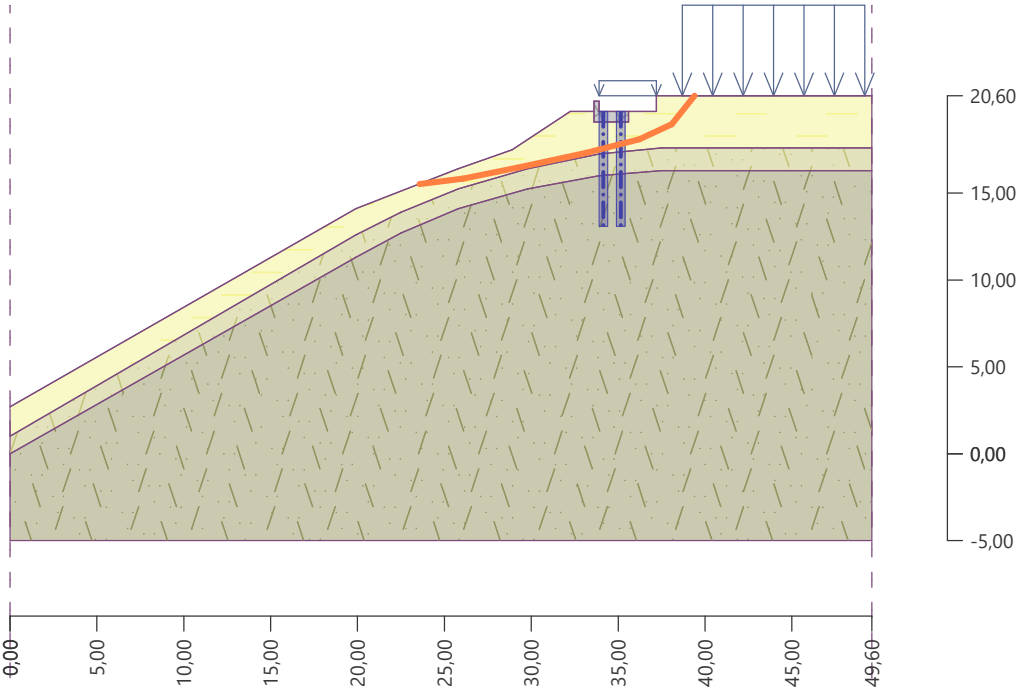

Piles verification 1

Anti-Slide pile : Anti-Slide Pile No. 1 (34,15; 19,70 [m])
Analysis : Calculation 1 (slip surface polygonal)
Method : Morgenstern-Price

Analysis of anti-slide pile

Input data

Settings

Slovenia - EN 1997 (52)

Materials and standards

Concrete structures : EN 1992-1-1 (EC2)
Coefficients EN 1992-1-1 : standard
Steel structures : EN 1993-1-1 (EC3)
Partial factor on bearing capacity of steel cross section : γ_{M0} = 1,00

Pressure analysis

Active earth pressure calculation : Coulomb
Passive earth pressure calculation : Caquot-Kerisel
Earthquake analysis : Mononobe-Okabe
Modulus of subsoil reaction : standard

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Consider reduction of the modulus of subsoil reaction for a braced sheeting
Verification methodology : according to EN 1997
Design approach : 2 - reduction of actions and resistances

Partial factors on actions (A)					
Permanent design situation					
		Unfavourable		Favourable	
Permanent actions :	γ_G =	1,35	[–]	1,00	[–]
Variable actions :	γ_Q =	1,50	[–]	0,00	[–]
Water load :	γ_w =	1,35	[–]		

Partial factors for resistances (R)			
Permanent design situation			
Partial factor on earth resistance :	γ_{Re} =	1,40	[–]

Anchors

Verification methodology : Limit states (LSD)

Reduction coefficients			
Reduction. coeff of steel strength :	γ_s =	1,35	[–]
Reduction coefficient of pull out resistance (soil) :	γ_e =	1,35	[–]
Reduction coefficient of pull out resistance (grouting) :	γ_c =	1,35	[–]

Geometry of structure

Structure length = 6,60 m

Cross-section name : Pile curtain d = 0,50 m; a = 1,20 m
Material of pile : concrete
Computed coefficient of pressure reduction below the ditch = 0,94
Area of cross-section A = 1,64E-01 m^2/m
Moment of inertia I = 2,56E-03 m^4/m
Elastic modulus E = 33000,00 MPa
Shear modulus G = 13750,00 MPa

Forces above the slip surface

Depth of slip surface h_{s1} = 2,13 m

Input of active horizontal force : residual active force
Input of passive horizontal force : residual passive force

Active horizontal force T = 99,16 kN/m
Passive horizontal force P = 74,76 kN/m

Distribution of active force : triangle
Distribution of passive force : triangle

Material of structure

Analysis of concrete structures carried out according to the standard EN 1992-1-1 (EC2).

Concrete : C 30/37
Cylinder compressive strength f_{ck} = 30,00 MPa
Tensile strength f_{ctm} = 2,90 MPa
Elasticity modulus E_{cm} = 33000,00 MPa
Shear modulus G = 13750,00 MPa

Longitudinal steel : B500
Yield strength f_{yk} = 500,00 MPa

Transverse steel: B500

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Yield strength f_{yk} = 500,00 MPa

Modulus of reaction

Modulus of subsoil reaction is computed by method Schmitt.

Basic soil parameters

No.	Name	Pattern	φ_{ef} [°]	c_{ef} [kPa]	γ [kN/m^3]	γ_{su} [kN/m^3]	δ [°]
1	Glina		21,00	3,00	19,00	9,00	21,00
2	Preperina		30,00	10,00	21,00	11,00	30,00
3	Hribina		34,00	30,00	23,00	13,00	34,00
4	AB vezna konzola		45,00	100,00	24,00	14,00	45,00

Soil parameters to compute pressure at rest

No.	Name	Pattern	Type calculation	φ_{ef} [°]	ν [–]	OCR [–]	K_r [–]
1	Glina		cohesive	-	0,40	-	-
2	Preperina		cohesive	-	0,30	-	-
3	Hribina		cohesive	-	0,20	-	-
4	AB vezna konzola		cohesive	-	0,16	-	-

Parameters of soils to compute modulus of subsoil reaction (Schmitt)

No.	Name	Pattern	ν [–]	E_{oed} [MPa]	E_{def} [MPa]
1	Glina		0,40	2,00	-
2	Preperina		0,30	20,00	-
3	Hribina		0,20	50,00	-
4	AB vezna konzola		0,16	80,00	-

Soil parameters

Glina

Unit weight : γ = 19,00 kN/m^3
Stress-state : effective
Angle of internal friction : φ_{ef} = 21,00 °
Cohesion of soil : c_{ef} = 3,00 kPa
Angle of friction struc.-soil : δ = 21,00 °
Soil : cohesive
Poisson's ratio : ν = 0,40
Oedometric modulus : E_{oed} = 2,00 MPa

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Saturated unit weight : γ_{sat} = 19,00 kN/m3

Preperina
Unit weight : γ = 21,00 kN/m3
Stress-state : effective
Angle of internal friction : φ_{ef} = 30,00 °
Cohesion of soil : c_{ef} = 10,00 kPa
Angle of friction struc.-soil : δ = 30,00 °
Soil : cohesive
Poisson's ratio : ν = 0,30
Oedometric modulus : E_{oed} = 20,00 MPa
Saturated unit weight : γ_{sat} = 21,00 kN/m3

Hribina
Unit weight : γ = 23,00 kN/m3
Stress-state : effective
Angle of internal friction : φ_{ef} = 34,00 °
Cohesion of soil : c_{ef} = 30,00 kPa
Angle of friction struc.-soil : δ = 34,00 °
Soil : cohesive
Poisson's ratio : ν = 0,20
Oedometric modulus : E_{oed} = 50,00 MPa
Saturated unit weight : γ_{sat} = 23,00 kN/m3

AB vezna konzola
Unit weight : γ = 24,00 kN/m3
Stress-state : effective
Angle of internal friction : φ_{ef} = 45,00 °
Cohesion of soil : c_{ef} = 100,00 kPa
Angle of friction struc.-soil : δ = 45,00 °
Soil : cohesive
Poisson's ratio : ν = 0,16
Oedometric modulus : E_{oed} = 80,00 MPa
Saturated unit weight : γ_{sat} = 24,00 kN/m3

Pile fixed into the rock

Length of wall in the rock l = 3,20 m
Bearing capacity of rock R = 3000,00 kPa

Geological profile and assigned soils

Position information
Terrain elevation = 19,70 m
Geological profile and assigned soils

No.	Thickness of layer t [m]	Depth z [m]	Altitude [m]	Assigned soil	Pattern
1	0,60	0,00 .. 0,60	19,70 .. 19,10	AB vezna konzola	
2	1,80	0,60 .. 2,40	19,10 .. 17,30	Glina	
3	1,26	2,40 .. 3,66	17,30 .. 16,04	Preperina	
4	-	3,66 .. ∞	16,04 .. -	Hribina	

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Excavation

Soil in front of wall is excavated to a depth of 0,00 m.

Ditch bottom shape

No.	Coordinate x [m]	Depth z [m]
1	0,00	0,01
2	0,00	0,01
3	-0,30	0,01
4	-0,30	0,01
5	-1,65	0,01
6	-5,00	2,20
7	-8,10	3,30
8	-14,00	5,60
9	-33,90	17,00
10	-34,90	17,00

Origin [0,0] is located at the ditch bottom.
Positive coordinate +z has downward direction.

Terrain profile

No.	Coordinate x [m]	Depth z [m]
1	0,00	0,00
2	0,10	0,00
3	1,20	0,00
4	2,80	0,00
5	2,80	-0,90
6	4,30	-0,90
7	5,30	-0,90

Origin [0,0] is located in upper right edge of construction.
Positive coordinate +z has downward direction.

Water influence

Ground water table is located below the structure.

Input surface surcharges

No.	Surcharge new	Surcharge change	Action	Mag.1 [kN/m^2]	Mag.2 [kN/m^2]	Ord.x x [m]	Length l [m]	Depth z [m]
1	Yes		permanent	200,00		4,30	10,50	on terrain
2	Yes		permanent	12,00		0,00	2,80	on terrain

No.	Name
1	Hiša
2	Nasip nad vezno konzolo

Global settings

Number of FEs to discretize wall = 100
Analysis of depending pressures : reduce according to analysis settings
Minimum dimensioning pressure is considered as $\sigma_{a,min} = 0{,}20\sigma_z$

Settings of the stage of construction

Design situation : permanent

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Analysis results

Pressure above the slip surface

Depth [m]	Passive pressure [kPa]	Active pressure [kPa]
0	0,00	0,00
0,00	0,00	0,00
0,00	0,00	0,00
2,13	70,09	92,97

Distribution of pressures acting on the structure (in front and behind the wall) - above slip surface

Depth [m]	Ta,p [kPa]	Tk,p [kPa]	Tp,p [kPa]	Ta,z [kPa]	Tk,z [kPa]	Tp,z [kPa]
0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.01	0.00	0.00	0.00	0.11	0.11	0.11
0.05	0.00	0.00	0.00	0.54	0.54	0.54
0.14	0.00	0.00	0.00	1.53	1.53	1.53
0.23	0.00	0.00	0.00	2.42	2.42	2.42
0.35	0.00	0.00	0.00	3.73	3.73	3.73
0.43	0.00	0.00	0.00	4.57	4.57	4.57
0.60	0.00	0.00	0.00	6.43	6.43	6.43
0.69	0.00	0.00	0.00	7.45	7.45	7.45
0.80	0.00	0.00	0.00	8.59	8.59	8.59
1.04	0.00	0.00	0.00	11.18	11.18	11.18
1.11	0.00	0.00	0.00	11.91	11.91	11.91
1.13	0.00	0.00	0.00	12.13	12.13	12.13
1.39	0.00	0.00	0.00	14.90	14.90	14.90
1.67	0.00	0.00	0.00	17.96	17.96	17.96
1.74	0.00	0.00	0.00	18.63	18.63	18.63
2.08	0.00	0.00	0.00	22.35	22.35	22.35
2.13	0.00	0.00	0.00	22.88	22.88	22.88

Distribution of pressures acting on the structure (in front and behind the wall) - below the slip surface

Depth [m]	Ta,p [kPa]	Tk,p [kPa]	Tp,p [kPa]	Ta,z [kPa]	Tk,z [kPa]	Tp,z [kPa]
2.13	-11.88	-20.21	-20.21	123.04	123.04	123.04
2.20	-12.16	-20.44	-20.44	123.46	123.46	123.46
2.29	-12.56	-20.76	-20.76	124.05	124.05	124.05
2.40	-13.30	-21.12	-21.12	124.71	124.71	124.71
2.40	-5.50	-19.33	-96.67	75.37	102.52	210.33
2.43	-5.72	-19.60	-97.84	75.54	102.73	212.80
2.75	-7.90	-22.29	-109.77	77.24	104.96	237.76
2.78	-8.09	-22.46	-110.82	77.39	105.15	239.96
2.80	-8.24	-22.58	-111.60	77.51	105.30	241.61
2.80	-8.27	-22.60	-111.78	77.55	105.34	241.97
2.87	-8.71	-22.98	-114.20	69.08	106.76	247.05
3.13	-10.47	-24.45	-123.79	35.65	112.37	267.12
3.13	-10.52	-24.50	-124.08	34.63	109.17	267.73
3.30	-11.25	-25.45	-130.27	13.02	41.06	280.70

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Depth [m]	Ta,p [kPa]	Tk,p [kPa]	Tp,p [kPa]	Ta,z [kPa]	Tk,z [kPa]	Tp,z [kPa]
3.40	0.00	0.00	-134.01	0.00	0.00	288.52
3.40	Rock	Rock	Rock	Rock	Rock	Rock
3.47	Rock	Rock	Rock	Rock	Rock	Rock
3.66	Rock	Rock	Rock	Rock	Rock	Rock
3.66	Rock	Rock	Rock	Rock	Rock	Rock
3.82	Rock	Rock	Rock	Rock	Rock	Rock
4.05	Rock	Rock	Rock	Rock	Rock	Rock
4.17	Rock	Rock	Rock	Rock	Rock	Rock
4.42	Rock	Rock	Rock	Rock	Rock	Rock
4.52	Rock	Rock	Rock	Rock	Rock	Rock
4.86	Rock	Rock	Rock	Rock	Rock	Rock
5.21	Rock	Rock	Rock	Rock	Rock	Rock
5.56	Rock	Rock	Rock	Rock	Rock	Rock
5.60	Rock	Rock	Rock	Rock	Rock	Rock
5.86	Rock	Rock	Rock	Rock	Rock	Rock
5.91	Rock	Rock	Rock	Rock	Rock	Rock
6.25	Rock	Rock	Rock	Rock	Rock	Rock
6.60	Rock	Rock	Rock	Rock	Rock	Rock

Distributions of the modulus of subsoil reaction and internal forces on the structure

Depth [m]	kh,p [MN/m3]	kh,z [MN/m3]	Displacement [mm]	Pressure [kPa]	Shear Force [kN/m]	Moment [kNm/m]
0.00	0.00	0.00	-9.66	0.00	-0.00	-0.00
0.01	0.00	0.00	-9.62	0.15	-0.00	0.00
0.33	0.00	0.00	-8.83	3.54	-0.58	0.06
0.66	0.00	0.00	-8.01	7.08	-2.34	0.51
0.99	0.00	0.00	-7.18	10.62	-5.26	1.73
1.32	0.00	0.00	-6.36	14.16	-9.34	4.11
1.65	0.00	0.00	-5.55	17.69	-14.60	8.03
1.98	0.00	0.00	-4.74	21.23	-21.02	13.87
2.11	0.00	0.00	-4.42	22.65	-23.92	16.84
2.14	0.00	0.00	-4.36	102.84	-24.81	17.45
2.31	0.00	0.00	-3.95	103.33	-42.62	23.27
2.64	24.37	0.00	-3.20	-22.60	-47.21	39.50
2.97	24.37	0.00	-2.49	-28.24	-40.60	54.04
3.30	24.37	0.00	-1.85	-57.62	-29.01	65.83
3.63	24.37	0.00	-1.30	-31.74	-15.68	73.00
3.96	82.68	0.00	-0.84	-69.81	10.98	73.75
4.29	82.68	0.00	-0.48	-39.73	28.84	66.90
4.62	82.68	0.00	-0.20	-16.75	37.98	55.67
4.95	0.00	82.68	0.00	0.31	40.55	42.56
5.28	0.00	82.68	0.16	12.82	38.28	29.44
5.61	0.00	82.68	0.27	22.19	32.43	17.68
5.94	0.00	82.68	0.36	29.64	23.85	8.33
6.27	0.00	82.68	0.44	36.17	12.97	2.20
6.60	0.00	82.68	0.51	42.44	-0.00	0.00

Maximum shear force = 52,11 kN/m
Maximum moment = 74,55 kNm/m

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Maximum displacement = 9,7 mm
Displacement in the depth of slip surface = 4,4 mm

Verification of rock bearing capacity

Bearing capacity of rock R = 3000,00 kPa
Partial factor on rock bearing capacity γ_{Rr} = 1,40
Max. stress σ = 238,78 kPa
Design bearing capacity of rock R_d = 2142,86 kPa

Bearing capacity of rock is SATISFACTORY

Terrain settlement behind the structure


Terrain settlement δ_{max} = 4,7 mm

	Coordinate x [m]	Settlement z [mm]
1	0,00	4,6
2	0,51	5,8
3	1,01	6,7
4	1,52	7,2
5	2,02	7,3
6	2,53	7,0
7	3,03	6,4
8	3,54	5,3
9	4,04	3,9
10	4,55	2,2
11	5,05	0,0
12	5,05	0,0


[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Name : Analysis	Stage - analysis : 1 - -1


Geometry of structure
Length of structure = 6,60m

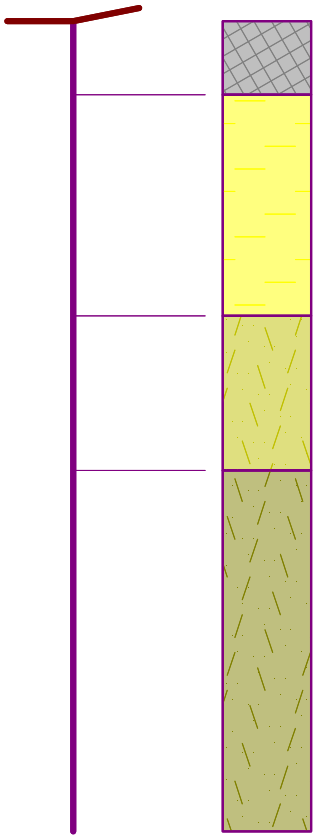

Displacement of structure
Max. disp. = 9,7 mm

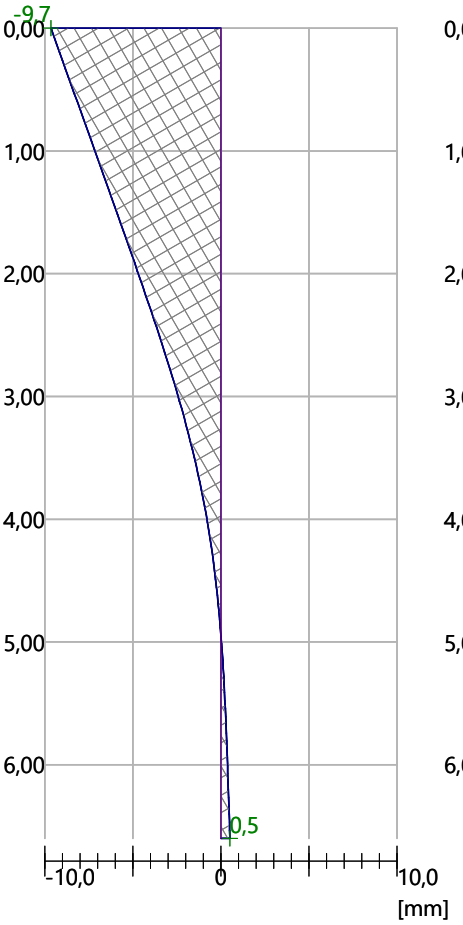

Pressure acting on structure
Max. pressure = 103,52 kPa

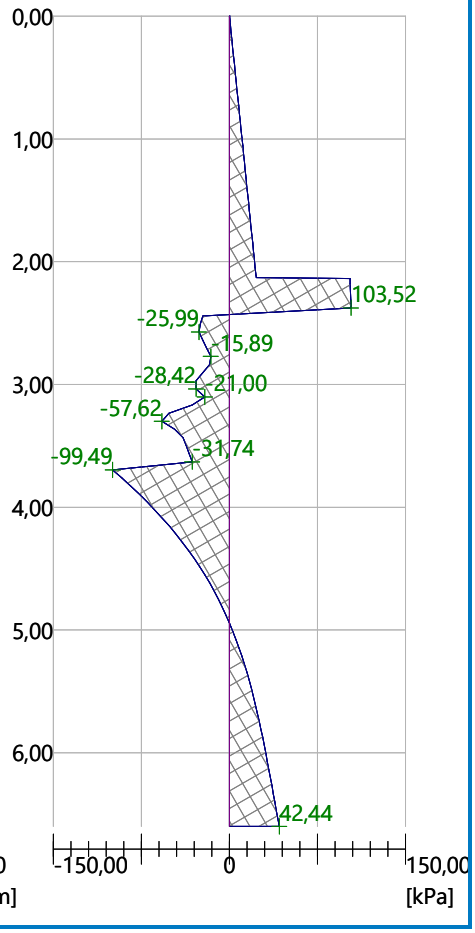


[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Name : Analysis	Stage - analysis : 1 - -1

Geometry of structure
Length of structure = 6,60m


Bending moment
Max. M = 74,55 kNm/m


Shear force
Max. Q = 52,11 kN/m

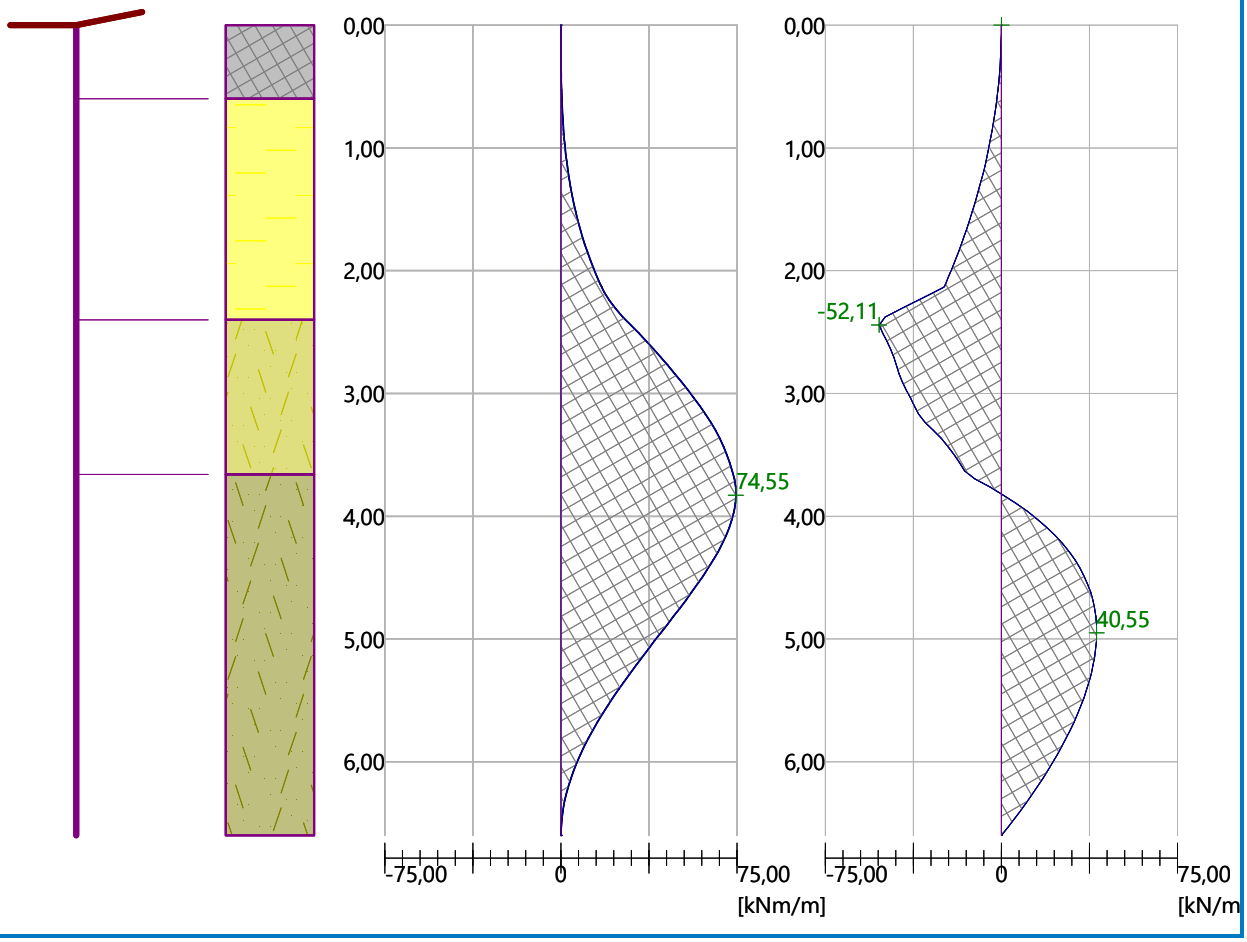

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Name : Analysis	Stage - analysis : 1 - -1

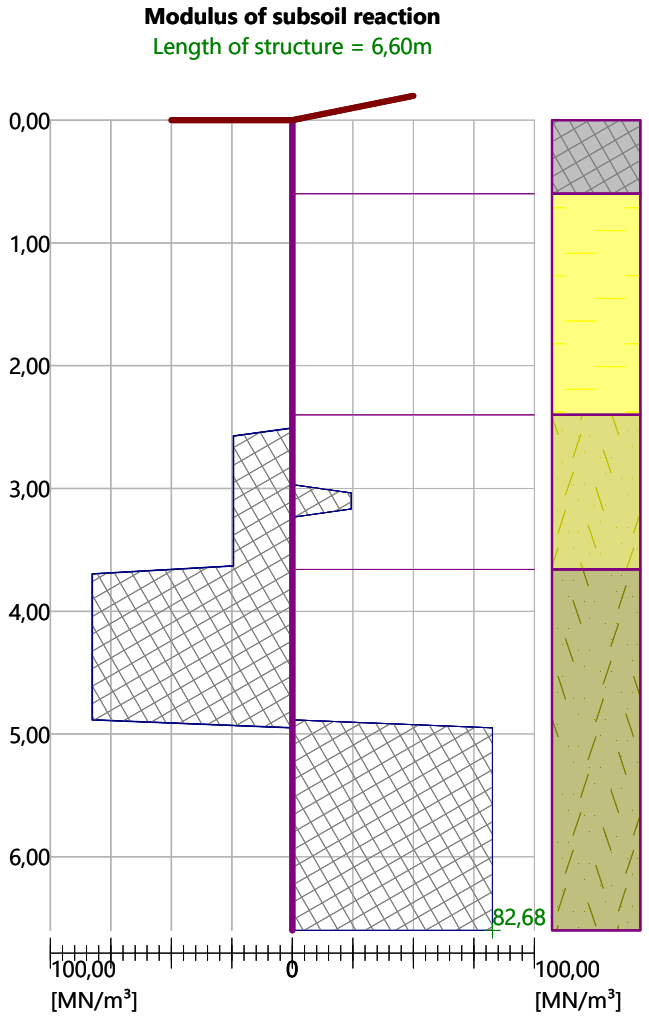

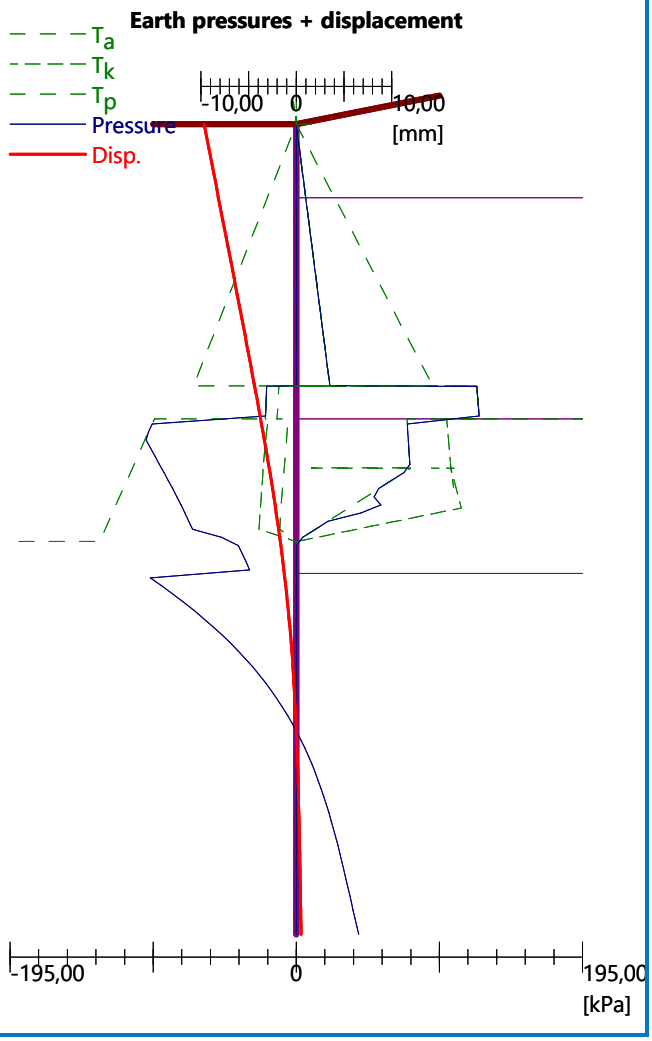

Dimensioning No. 1

	Disp. min [mm]	Disp. max [mm]	Shear force min. [kN/m]	Shear force max [kN/m]	Moment min. [kNm/m]	Moment max. [kNm/m]
0.00	-9.66	-9.66	-0.00	-0.00	-0.00	-0.00
0.01	-9.64	-9.64	-0.00	-0.00	0.00	0.00
0.01	-9.64	-9.64	-0.00	-0.00	0.00	0.00
0.01	-9.62	-9.62	-0.00	-0.00	0.00	0.00
0.01	-9.62	-9.62	-0.00	-0.00	0.00	0.00
0.33	-8.83	-8.83	-0.58	-0.58	0.06	0.06
0.66	-8.01	-8.01	-2.34	-2.34	0.51	0.51
0.99	-7.18	-7.18	-5.26	-5.26	1.73	1.73
1.32	-6.36	-6.36	-9.34	-9.34	4.11	4.11
1.65	-5.55	-5.55	-14.60	-14.60	8.03	8.03
1.98	-4.74	-4.74	-21.02	-21.02	13.87	13.87
2.11	-4.42	-4.42	-23.92	-23.92	16.84	16.84
2.13	-4.38	-4.38	-24.31	-24.31	17.25	17.25
2.13	-4.38	-4.38	-24.31	-24.31	17.25	17.25
2.14	-4.36	-4.36	-24.81	-24.81	17.45	17.45
2.31	-3.95	-3.95	-42.62	-42.62	23.27	23.27

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

	Disp. min [mm]	Disp. max [mm]	Shear force min. [kN/m]	Shear force max [kN/m]	Moment min. [kNm/m]	Moment max. [kNm/m]
2.64	-3.20	-3.20	-47.21	-47.21	39.50	39.50
2.97	-2.49	-2.49	-40.60	-40.60	54.04	54.04
3.30	-1.85	-1.85	-29.01	-29.01	65.83	65.83
3.63	-1.30	-1.30	-15.68	-15.68	73.00	73.00
3.96	-0.84	-0.84	10.98	10.98	73.75	73.75
4.29	-0.48	-0.48	28.84	28.84	66.90	66.90
4.62	-0.20	-0.20	37.98	37.98	55.67	55.67
4.95	0.00	0.00	40.55	40.55	42.56	42.56
5.28	0.16	0.16	38.28	38.28	29.44	29.44
5.61	0.27	0.27	32.43	32.43	17.68	17.68
5.94	0.36	0.36	23.85	23.85	8.33	8.33
6.27	0.44	0.44	12.97	12.97	2.20	2.20
6.60	0.51	0.51	-0.00	-0.00	0.00	0.00

Maximum values of internal forces

Maximum displacement = -9,7 mm
Minimum displacement = 0,5 mm
Maximum bending moment = 74,55 kNm/m
Minimum bending moment = 0,00 kNm/m
Maximum shear force = 52,11 kN/m

Verification of RC cross section (Pile curtain d = 0,50 m; a = 1,20 m)

All construction stages are taken into the analysis.
Reduct. coefficient of bearing capacity = 1,00

Verification of cross section in bending:

Reinforcement - 6 pc bars 16,0 mm; cover 40,0 mm
Type of structure (reinforcement ratio) : beam
Reinforcement ratio ρ = 0,307 % > 0,151 % = ρ_{min}
Load : M_{Ed} = 89,46 kNm
Bearing capacity : M_{Rd} = 102,83 kNm
Designed pile reinforcement is SATISFACTORY

Verification of cross section in shear:


Shear reinf. - 2 profile 10,0 mm; distance 250,0 mm
A_{sw} = 628,3 mm^2
Ultimate shear force: V_{Rd} = 245,86 kN > 62,53 kN = V_{Ed}
Cross-section is SATISFACTORY.
only minimal shear reinforcement

Overall verification: Cross-section is SATISFACTORY


[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]

Name : Dimensioning | **Stage - analysis : 1 - 1**


Displacement
Min1 = 0,5; Min2 = -9,7mm
Max1 = 0,5; Max2 = -9,7mm

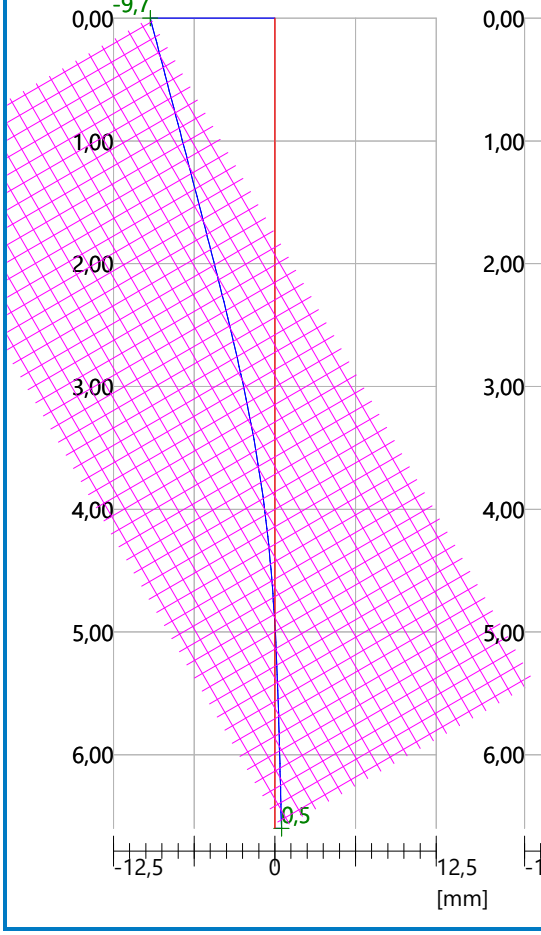

Bending moment
Min1 = 74,55; Min2 = 0,00kNm/m
Max1 = 74,55; Max2 = 0,00kNm/m

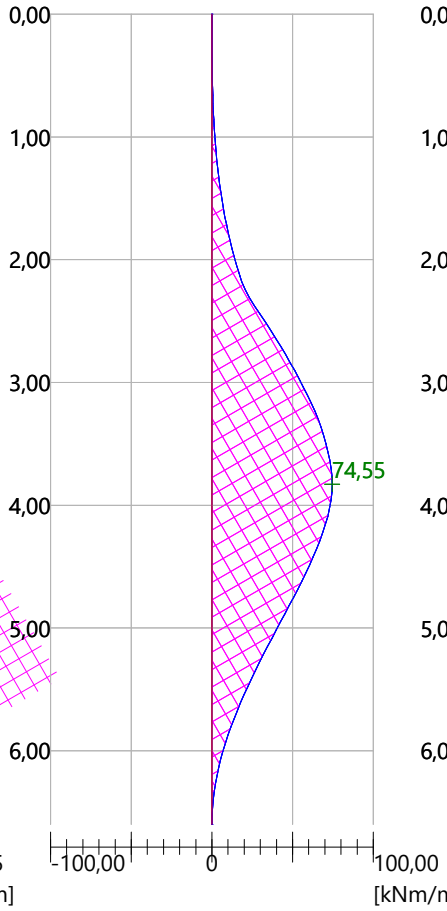

Shear force
Min1 = 40,55; Min2 = -52,11kN/m
Max1 = 40,55; Max2 = -52,11kN/m

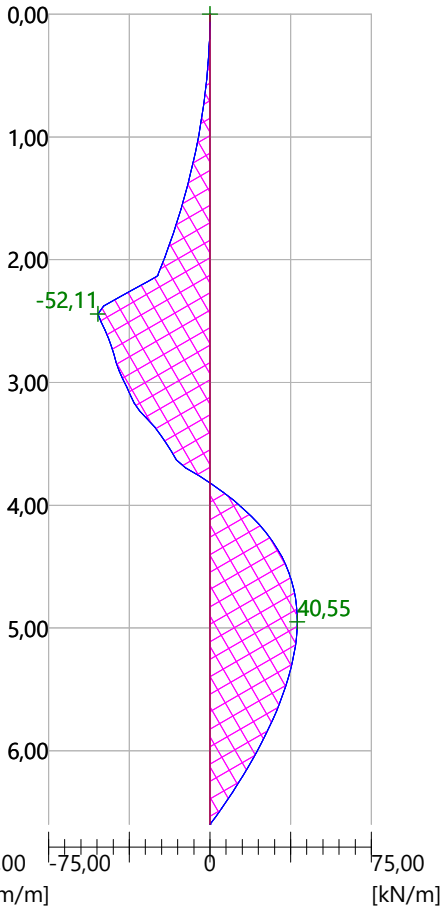

[GEO5 - Slope Stability | version 5.2019.78.0 | hardware key 9230 / 1 | GEOING d.o.o. | Copyright © 2021 Fine spol. s r.o. All Rights Reserved | www.finesoftware.eu]